


Cankaya University
 Faculty of Engineering
 Mechanical Engineering
 Chapter 2 Examples
 Fall 2018


- 1) Consider a long pipe of inner radius r_1 , outer radius r_2 , and thermal conductivity k . Fluid is passing through the pipe at T_i with a heat transfer coefficient of \bar{h}_i . The outer surface of the pipe is subjected to convection to a medium at T_∞ with a heat transfer coefficient of \bar{h}_o . Assume that uniform energy \dot{q}''' is generated within the pipe wall. Write down the

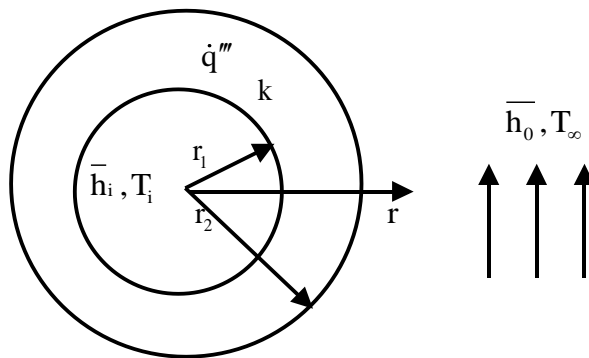

conditions.


- 2)

Consider a spherical container of inner radius r_1 , outer radius r_2 , and thermal conductivity k . Express the boundary condition on the inner surface of the container for steady one-dimensional conduction for the following cases: (a) specified temperature of 50°C , (b) specified heat flux of 45 W/m^2 toward the center, (c) convection to a medium at T_∞ with a heat transfer coefficient of \bar{h} .

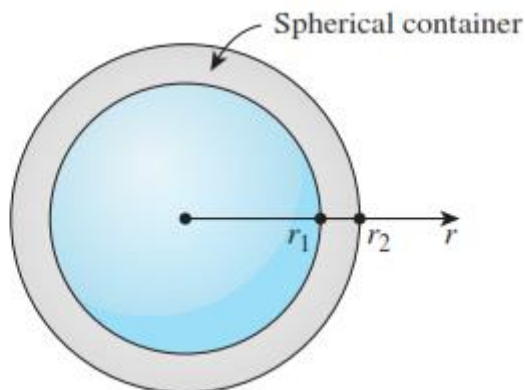

3)


A flat-plate solar collector is used to heat water by having water flow through tubes attached at the back of the thin solar absorber plate. The absorber plate has an emissivity and an absorptivity of 0.9. The top surface ($x = 0$) temperature of the absorber is $T_0 = 35^\circ\text{C}$, and solar radiation is incident on the absorber at 500 W/m^2 with a surrounding temperature of 0°C . Convection heat transfer coefficient at the absorber surface is $5 \text{ W/m}^2\cdot\text{K}$, while the ambient temperature is 25°C . Show that the variation of temperature in the absorber plate can be expressed as $T(x) = -(\dot{q}_0/k)x + T_0$, and determine net heat flux \dot{q}_0 absorbed by the solar collector.

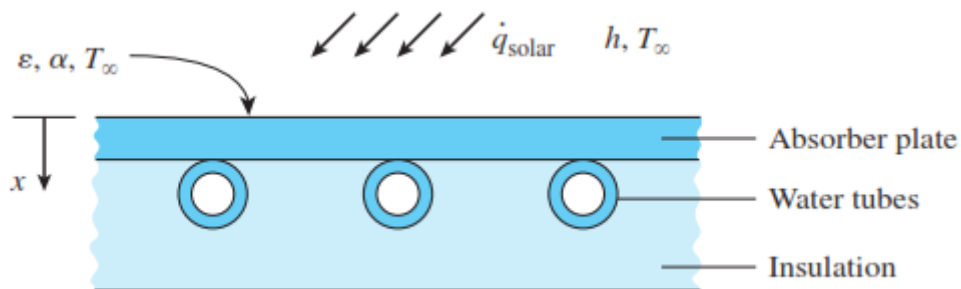

4)

A long homogeneous resistance wire of radius $r_o = 0.6 \text{ cm}$ and thermal conductivity $k = 15.2 \text{ W/m}\cdot\text{K}$ is being used to boil water at atmospheric pressure by the passage of electric current. Heat is generated in the wire uniformly as a result of resistance heating at a rate of 16.4 W/cm^3 . The heat generated is transferred to water at 100°C by convection with

an average heat transfer coefficient of $h = 3200 \text{ W/m}^2\cdot\text{K}$. Assuming steady one-dimensional heat transfer, (a) express the differential equation and the boundary conditions for heat conduction through the wire, (b) obtain a relation for the variation of temperature in the wire by solving the differential equation, and (c) determine the temperature at the centerline of the wire. *Answer: (c) 125°C*

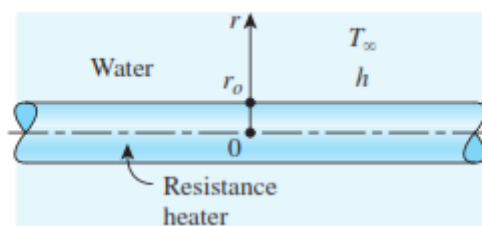

Assume steady state conditions.

